

A contact

for rough environment




LAMELLAR SPRING

- Good contact with at least 10 contact points
- Self-cleaning
- Low insertion and removal forces
- Low electrical resistance


CONTACT SCREW

- Combi slot size 2
- Metric
- Brass screws

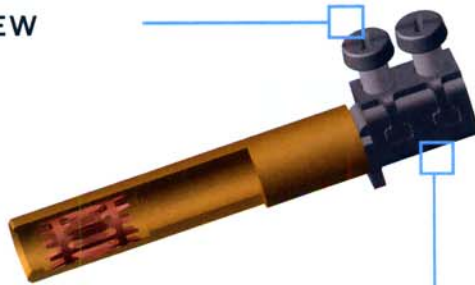

CONTACT FRAME

- Large open connecting area
- Reliable clamping of the conductor
- Flexible cables without end sleeve



GRUB SCREW ON 125A

Saves time

Simple insertion of the cable in less time

Strain relief and sealing of the cable by tightening the cable-lock-gland

Self-adjusting gasket for different cable diameters

for 63A from \varnothing 14,5mm to \varnothing 36mm
for 125A from \varnothing 22,5mm to \varnothing 50mm

Maximum cable security

LOCKING SCREW

- Prevents undesirable loosening

STRAIN-RELIEF CLAW

- Can withstand high loads

TRAPEZOIDAL THREAD

- Can withstand high loads

GASKET

- Protection degree IP66 /IP67

CAP NUT

- Optimal housing shaped for a firm grip

